

CR2600 COPY ROUTER

CR2600 COPY ROUTER

The CR 2600 Copy Router is a manual copy router with pneumatic clamps, lubrication and pneumatic tracer points. The unit is equipped with pneumatic turning table at three positions -90°- 0° - 90° with goniometer (accurate scale) for adjusting intermediate angles. It is also equipped with a variable speed spindle adjustable by inverter and potentiometer (from 2800 to 12000rpm) with three phase motor 1,5HP.



Its' working capacities are 2600x265x200mm (102x10.4x7.8in). It also boasts 2 pneumatically actuated tracer points. With 4 movable pneumatic clamps. X axis sliding on linear guides. Specially advised for working on aluminum, PVC, stainless and steel.


COMPONENTS SUPPLIED:

- Collet D. 8mm
- No.4 pneumatic clamps
- No.3 tracer points with 3 diameters: 5/8/10mm
- No.5 manual stops
- No.3 copy templates
- Pneumatic spray mist lubrication
- Air filter
- Air gun

OPTIONS:

- Blank template
- Collet D. 10mm
- Emulsified cutting oil 20IL

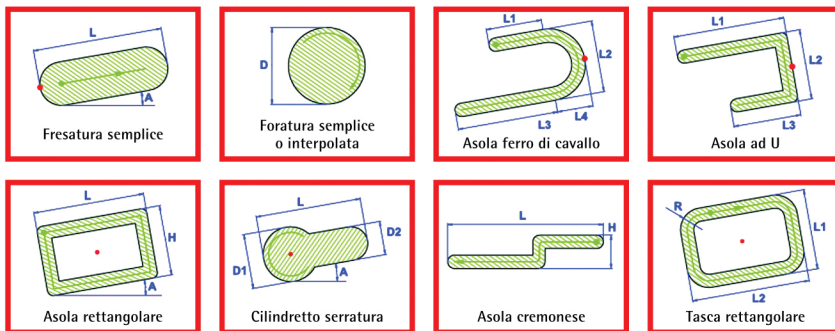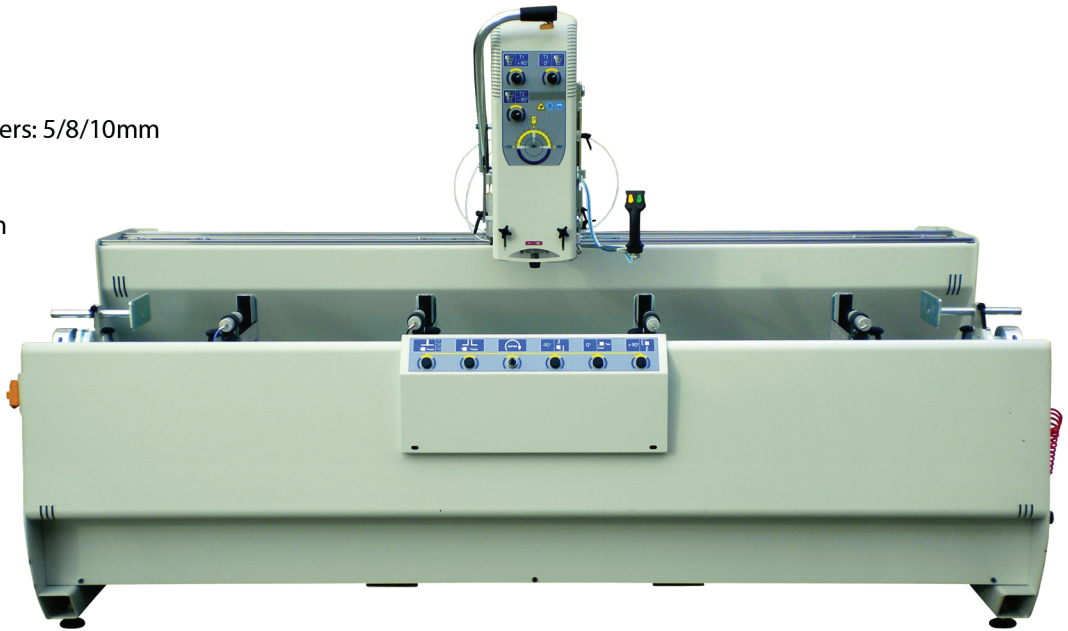

Ingombro Overall dimensions - Abmessungen - Dimensiones - Dimensões - Encombrement				Peso Weight - Gewicht - Poids	
L	W	H			
3070	1300	1850	Kg 750		